


DEFLECTION SLOTTED TRACK U SHAPE

TRS50100-090

Slotted Track	Depth	Width	Thickness
---------------	-------	-------	-----------

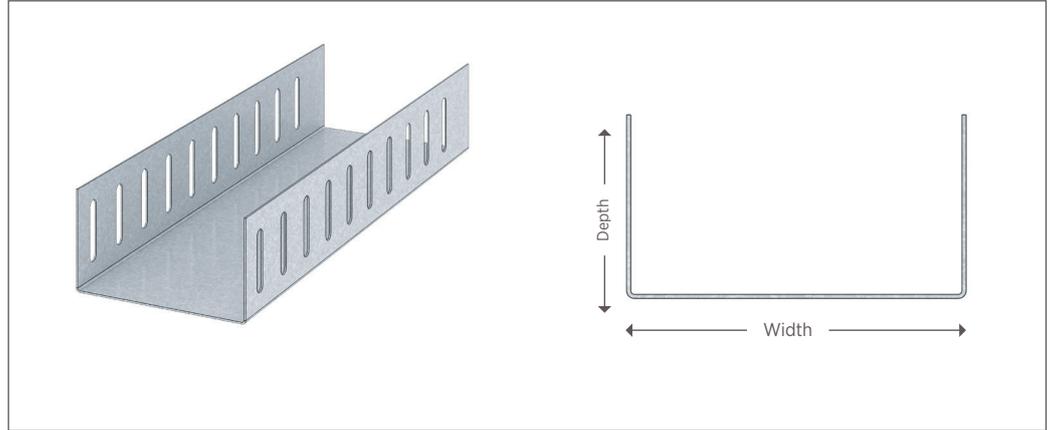

DESCRIPTION

- Used in wall assemblies allowing for vertical deflection of floor beams or floor decks above the interior partitions
- Custom made flange depth varying from 50 to 100mm suitable for vertical deflection movement exceeding 30 mm
- Used for a wall height which above of 3.5m

DIMENSIONS

Depth: 50mm to 100mm
Width: 50-200mm
Thickness: 0.9mm
Perforations width: 6mm
Distance between perforations: 25.4mm

MATERIALS

HDG G90 Zinc coating

STEEL GRADE

Yield stress, Fy 33 ksi Ultimate

ASTM & CODE STANDARDS

- USG Deflection Slotted Track is produced to meet or exceed ASTM C645 and C955
- Galvanized sheet steel meets or exceeds requirements of ASTM A-653
- For installation & storage information refer to ASTM C1007 & C754

GREEN BENEFITS

LEED Credit MR 2 - USG products are manufactured from cold-formed steel. Steel is 100% recyclable, which helps divert debris from the waste stream.

LEED Credit MR 4 - USG's steel products have a minimum of 25.5% postconsumer recycled content, and 6.8% pre-consumer.

REFERENCES

For further health and safety instructions, refer to the Safety Data Sheet (SDS) for this product, available from your USG Middle East sales office or USGme.com

Notice:

As we are involved in constant products development; this document information is subject to change without prior notice. Please always refer to usgme.com for the updated products information document.

©2022 Factory of USG Middle East LTD. Co. All rights reserved.