


DRYWALL CONTROL JOINT

CJA	75
Control Joint	A: Aluminium S: Steel
	Thickness

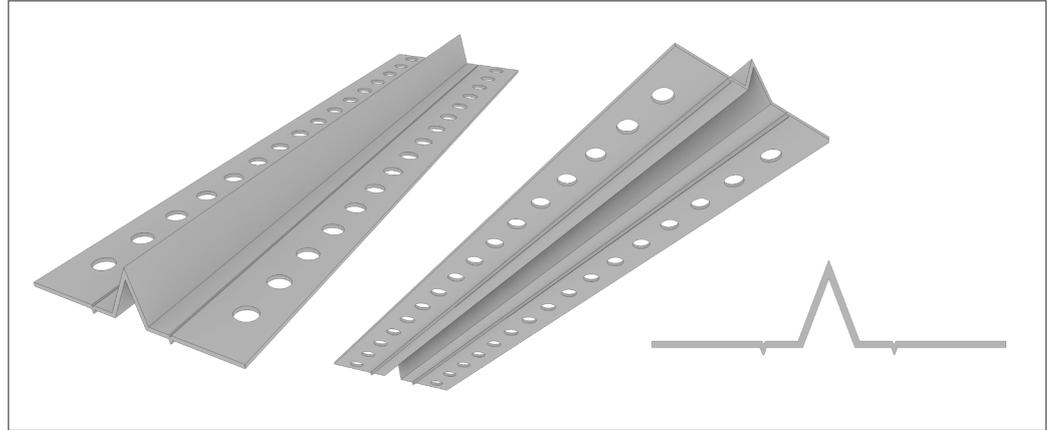

DESCRIPTION


Allowing for expansion in both walls and ceilings, USG control joint has been designed for movement of up to 6m in each direction.

DIMENSIONS

Length: 3000 mm
Dimensions: 11.5x48 mm
Thickness:
 • Steel: 0.45mm
 • Aluminium: 0.75mm
Perforations: Two standard patterns

PERFORATIONS

Standard - 2 Patterns



RAW MATERIALS

- Steel: Galvanized G40-G90
- Aluminium: Alloy 6063

MATERIALS GRADE

- Steel: Yield stress, Fy 33 ksi Ultimate
- Aluminium: Yield stress, Fy 28 ksi Ultimate

ASTM & CODE STANDARDS

- Metal Control Joint are produced to meet or exceed ASTM C645 and C955.
- Galvanized sheet steel meets or exceeds requirements of ASTM A-653.
- For installation & storage information refer to ASTM C840 & C754

GREEN BENEFITS

LEED Credit MR 2 - USG products are manufactured from cold-formed steel. Steel is 100% recyclable, which helps divert debris from the waste stream.

LEED Credit MR 4 - USG's steel products have a minimum of 25.5% postconsumer recycled content, and 6.8% pre-consumer.

REFERENCES

For further health and safety instructions, refer to the Safety Data Sheet (SDS) for this product, available from your USG Middle East sales office or USGme.com

Notice:

As we are involved in constant products development; this document information is subject to change without prior notice. Please always refer to usgme.com for the updated products information document.

©2023 Factory of USG Middle East LTD. Co. All rights reserved.