


# DRYWALL FIXING BRACKET

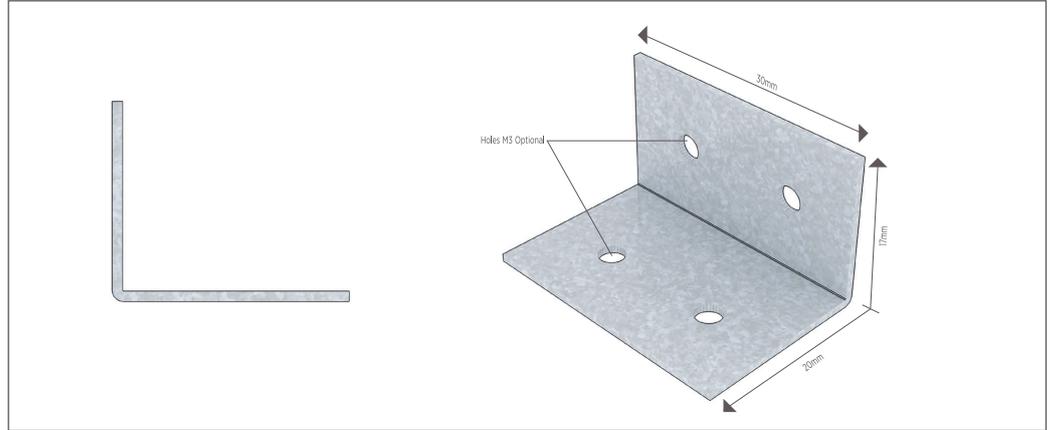

**DESCRIPTION**

Used in wall assemblies allowing for supporting a vertical load or providing lateral bracing CRC connections and floor joist hangers.

**DIMENSIONS**

**Thickness Range:** 0.9, 1.20 and 1.5mm  
**Dimension:** 17 x 20 x 30mm

**RAW MATERIALS**

HDG Galvanized G40-G90 Zinc coating weight

**STEEL GRADE**

Yield stress, Fy 33 ksi Ultimate

**ASTM & CODE STANDARDS**

- USG Boral Fixing Bracket is produced to meet or exceed ASTM C645 and C955
- Galvanized sheet steel meets or exceeds requirements of ASTM A-653
- For installation & storage information refer to ASTM C1007 & C754

**GREEN BENEFITS AND RECYCLED CONTENT**

- LEED Credit MR 2 - USG products are manufactured from cold-formed steel. Steel is 100% recyclable, which helps divert debris from the waste stream.
- LEED Credit MR 4 - USG's steel products have a minimum of 25.5% postconsumer recycled content, and 6.8% pre-consumer.

**REFERENCES**

For further health and safety instructions, refer to the Safety Data Sheet (SDS) for this product, available from your USG Middle East sales office or [USGme.com](http://USGme.com)

**Notice:**

As we are involved in constant products development; this document information is subject to change without prior notice. Please always refer to [usgme.com](http://usgme.com) for the updated products information document.

©2022 Factory of USG Middle East LTD. Co. All rights reserved.