


DRYWALL W ANGLE

WA202006

W Angle	Width	Length	Thickness
---------	-------	--------	-----------

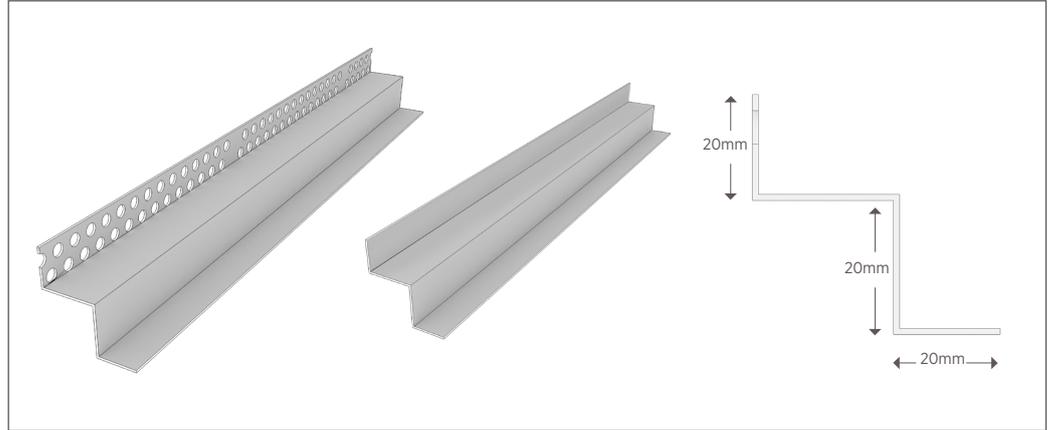

DESCRIPTION

Create a reveal edge look at ceiling perimeter installations whilst helping to hide imperfections in the abutting walls. The W angle considered as part of the Drywall ceiling attached to the wall.

PRODUCT DATA

W-Shape 20x20x20x20 mm

Length: Standard 3000mm-3600 mm could be made as per customer requirements

Thickness: From 0.45 to 0.90 mm

Perforation: Plain and perforated

RAW MATERIALS

- Galvanized steel G40-G90

STEEL GRADE

Yield stress, Fy 33 ksi Ultimate

ASTM & CODE STANDARDS

- Shadow Angles are produced to meet or exceed ASTM C645, C635 and C955
- Galvanized sheet steel meets or exceeds requirements of ASTM A-653
- For installation & storage information refer to ASTM C1007 & C754

GREEN BENEFITS

LEED Credit MR 2 – USG products are manufactured from cold-formed steel. Steel is 100% recyclable, which helps divert debris from the waste stream.

LEED Credit MR 4 – USG’s steel products have a minimum of 25.5% postconsumer recycled content, and 6.8% pre-consumer.

REFERENCES

For further health and safety instructions, refer to the Safety Data Sheet (SDS) for this product, available from your USG Middle East sales office or USGme.com

Notice:

As we are involved in constant products development; this document information is subject to change without prior notice. Please always refer to usgme.com for the updated products information document.

©2022 Factory of USG Middle East LTD. Co. All rights reserved.