


## PAINTED

### Gypsum Tile

VISIT USGME.COM TO ORDER SAMPLES

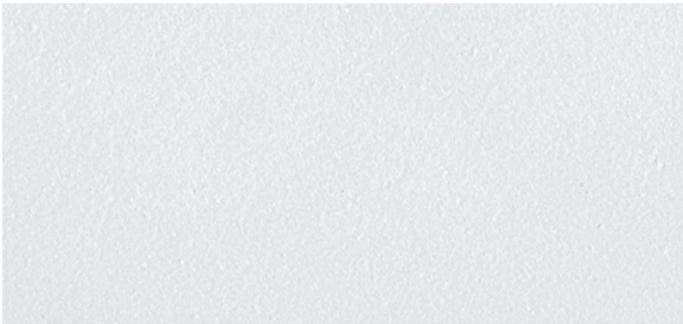

#### FEATURES & BENEFITS

- Painted Gypsum Ceiling with acrylic emulsion matte finish for smooth and brighter surface.
- High humidity resistant; sag resistance ensures durability in standard or extreme environmental conditions. Can be installed during early construction phase.
- Durable, scuff, and scratch resistant for longer life.
- High Light Reflectance (LR-0.88) reduces light fixtures & energy use.
- Economical and easy to trim and install.
- Demountable and designed to be installed on the DONN® Brand ceiling suspensions.

#### APPLICATIONS

- Laboratories
- Commercial retails
- Restrooms and wet areas
- Department stores

#### TABLE OF PERFORMANCE

Edge Detail	Item	Size (mm)	CAC	Light Reflectance	Anti-Mold & Mildew/Sag Resistance	Fire Rating	Recycled Content	VOC Emission	Cost
SQ 	GT-BS6609	600*600*9.5	35	88%			7%	Low	\$
	GT-BS2209	610*610*9.5							
	GT-BS662	600*600*12.5	40	88%			7%	Low	\$\$
	GT-BS222	610*610*12.5							
	GT-BS622	600*1200*12.5	40	88%			7%	Low	\$\$
	GT-BS242	610*1220*12.5							
SL 	GT-BSR662	600*600*12.5	40	88%			7%	Low	\$\$
	GT-BSR222	610*610*12.5							
	GT-BSR622	600*1200*12.5	40	88%			7%	Low	\$\$
	GT-BSR242	610*1220*12.5							
FL 	GT-BSRF662	600*600*12.5	40	88%			7%	Low	\$\$
	GT-BSRF222	610*610*12.5							
	GT-BSRF622	600*1200*12.5	40	88%			7%	Low	\$\$
	GT-BSRF242	610*1220*12.5							



PRODUCT  
CERTIFIED  
FOR  
ENVIRONMENTAL  
PRODUCT  
DECLARATION



CEILING  
ATTENUATION  
CLASS

## GRID PROFILE OPTIONS

DX/DXL SQ Edge	DX/DXL SL Edge	DXT FL Edge	DXF FL Edge

## SPECIFICATION DETAILS

Painted Gypsum Ceiling Tile meets specifications in accordance with ASTM E1264.

### Materials Classification

Type: XX,  
Pattern: G

### Substrate and Surface Finish

Gypsum ceiling panel finished with factory-applied water-based paint

### Thickness

9.5mm, 12.5mm

### Size

600 x 600mm, 610 x 610mm,  
600 x 1200mm, 610 x 1220mm

### Edge Detail Trim

Square, Reveal [SL, FL]

### Weight

9.5mm [6.65 kg/m<sup>2</sup>],  
12.5mm [8.75 kg/m<sup>2</sup>]

### Ceiling Attenuation Class [CAC]

[35-40]

### Mold Prevention

Inherent to Mold/Mildew growth panels are available upon request

### Humidity Resistance

Maximum 95% RH / 40°C

### Light Reflectance Coefficient [LR]

0.88

### Color

Matt White similar to RAL 9016

### Surface Burning Characteristics per

#### ASTM E 84

Class A

### Thermal Resistance

12.5mm [ R 0.45]

### Formaldehyde Classification

Class E1 as per EN717-1