
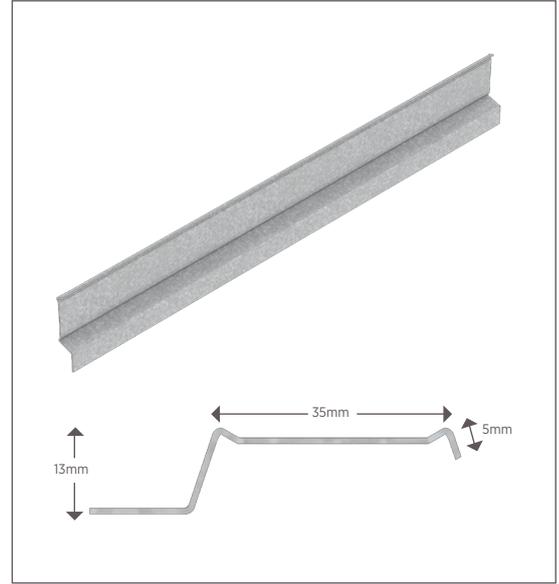


RESILIENT CHANNEL SINGLE LIP

RC351306

Resilient Channel	Width	Height	Thickness

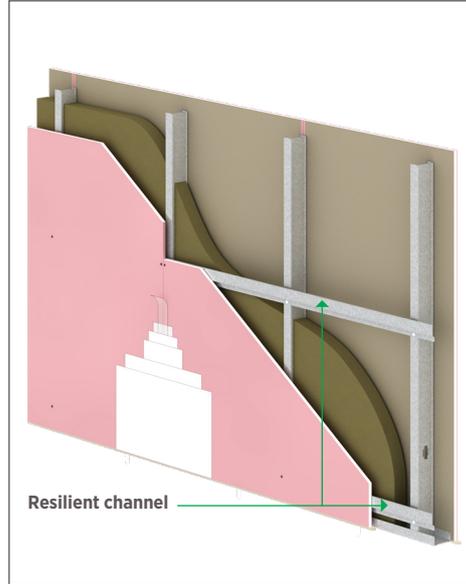

DESCRIPTION

Used in Drywall framing applications to improve the STC rate in Wall Partition

MATERIAL PROPERTIES

- Thickness: 0.6 mm
- Height: 13 mm
- Length: 3000mm
- Galvanized steel G40-G90 Zinc Coating

STEEL GRADE

Yield stress, Fy 33 ksi Ultimate

ASTM & CODE STANDARDS

- Resilient Channels are produced to meet or exceed ASTM C645 and C955
- Galvanized sheet steel meets or exceeds requirements of ASTM A-653
- For installation & storage information refer to ASTM C1007 & C754

GREEN BENEFITS

LEED Credit MR 2 - USG products are manufactured from cold-formed steel. Steel is 100% recyclable, which helps divert debris from the waste stream.

LEED Credit MR 4 - USG's steel products have a minimum of 25.5% postconsumer recycled content, and 6.8% pre-consumer.

REFERENCES

For further health and safety instructions, refer to the Safety Data Sheet (SDS) for this product, available from your USG Middle East sales office or USGme.com

Notice:

As we are involved in constant products development; this document information is subject to change without prior notice. Please always refer to usgme.com for the updated products information document.

©2022 Factory of USG Middle East LTD. Co. All rights reserved.