


SCREW SELF DRILLING

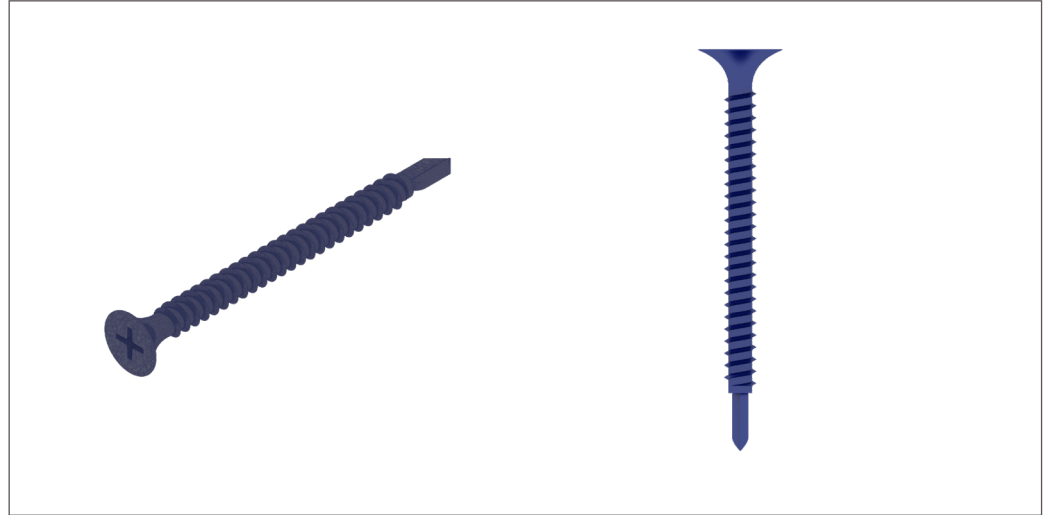

DESCRIPTION

Substrates and plasterboard screws are fasteners for single-layer and multi-layer drywall planking, insulation and accessory mountings on steel structures made of heavy gauge metal. Designed for Durock®, Solidrock, Securock® and Fiberock® wallboards

PRODUCT DATA

Material: hardened steel

Length: 32 and 42 mm

Finish: Ruspert blue

Quantity per box:

Length	32mm	42mm
Quantity (pc)	1000	500
Item Code	172373	172372

SPECIAL CHARACTERISTICS

- Philips head recess
- Special drill point

RUST PROTECTION

- Anti corrosion treatment by zinc coating
- Available in 1500h salt spray test

STANDARDS

These screws comply with:

- ASTM C 1002 – 98 standard specifications for steel drill screws for application of gypsum panel products or metal plaster bases.

APPLICATION

In a dry wall system, plasterboard screws are used for rapid attachment of facing materials to steel framing by a power screw driver. They are used in all types of drywalls partitions, liner walls & ceilings.

REFERENCES

For further health and safety instructions, refer to the Safety Data Sheet (SDS) for this product, available from your USG Middle East sales office or USGme.com

Notice:

As we are involved in constant products development; this document information is subject to change without prior notice. Please always refer to usgme.com for the updated products information document.

©2022 Factory of USG Middle East LTD. Co. All rights reserved.