


# USG DONN® BRAND AX™/AXCE™ SUSPENSION SYSTEM (ALUMINIUM)

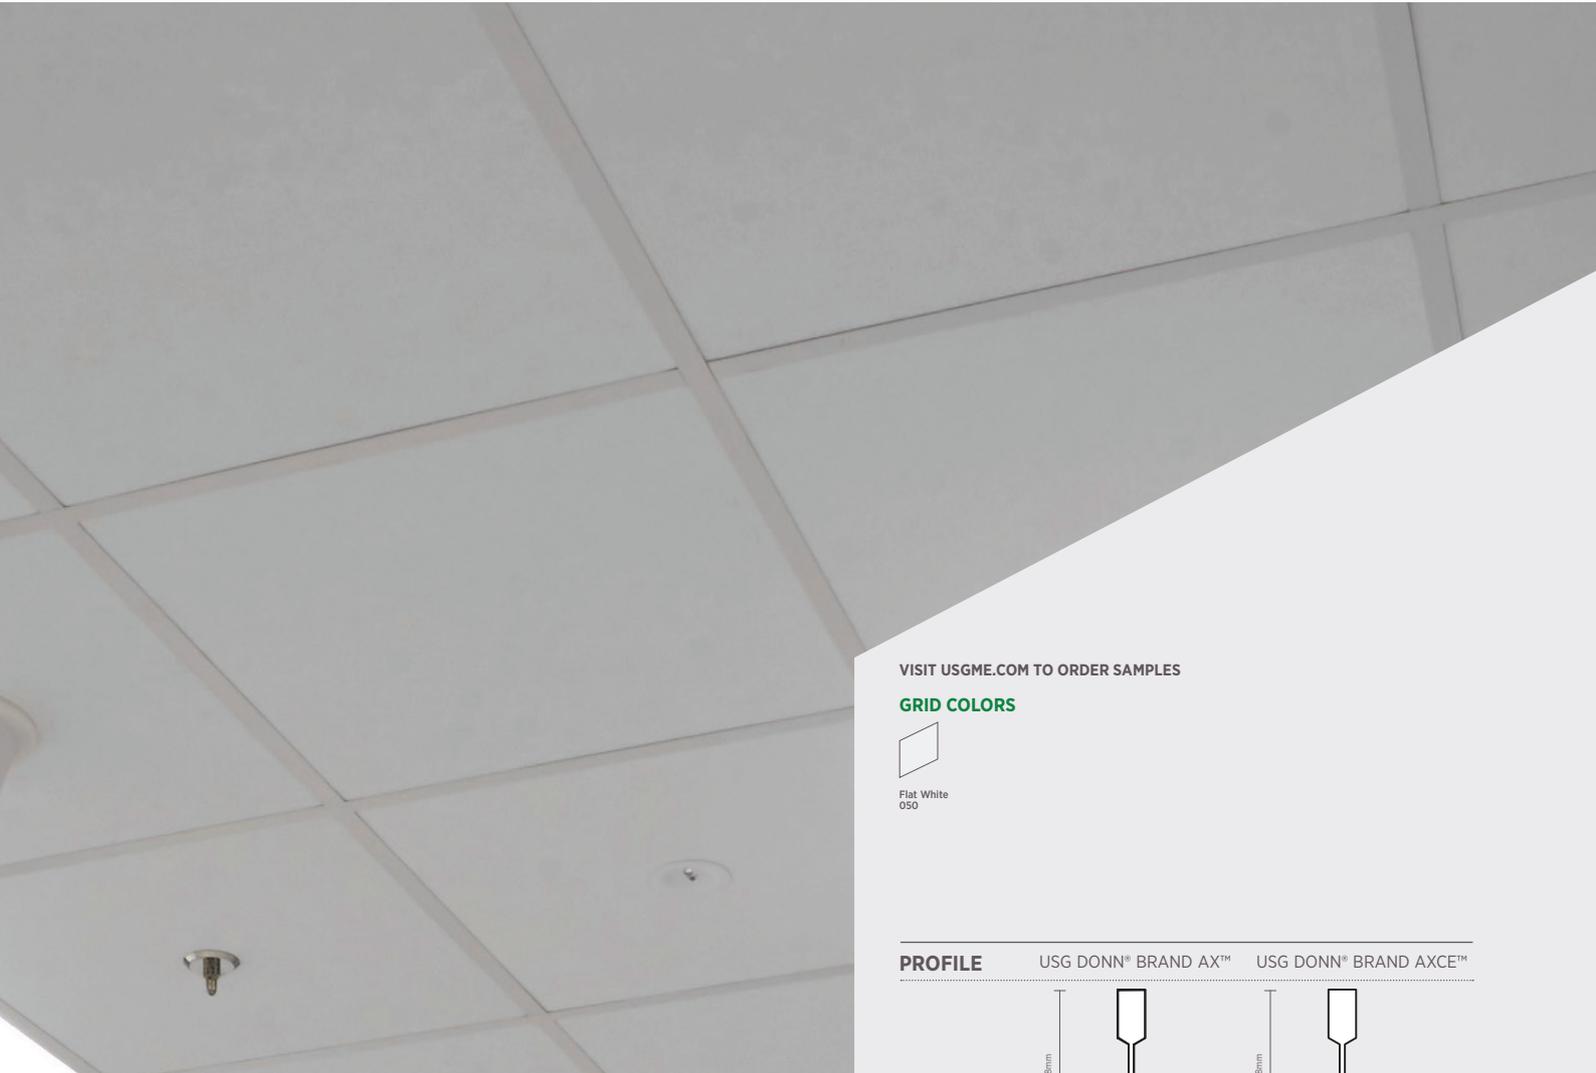

## FEATURES AND BENEFITS

- Meets 2018 Guidelines For Healthcare Facilities.
- Noncorrosive aluminium 24mm exposed grid system with stainless steel clip, ideal for high-humidity or wet-cleaned areas.
- Capable of withstanding cleaning and/or disinfecting chemicals as tested in accordance with ASTM D5402.
- Tested for environmental conditions in accordance with ASTM C635.
- Aluminum components can be used in nonmagnetic environments and meet USDA/FSIS requirements.
- Cross-tee override-ends resist twisting and give a professionally finished look.
- Proprietary stainless steel Quick-Release™ clip.
- Up to 90% recycled content.
- Factory applied, white closed cell foam gasket.

## APPLICATIONS

- Healthcare facilities, restricted and semi-restricted areas
- MRI rooms
- Magnetic-free zones
- High-humidity areas
- Food processing areas
- Certified to meet ISO 14644-1 Class 5 (Fed. Standard 209E Class 100)

VISIT [USGME.COM](http://USGME.COM) TO ORDER SAMPLES

## GRID COLORS




Flat White  
050


## PROFILE

USG DONN® BRAND AX™


USG DONN® BRAND AXCE™

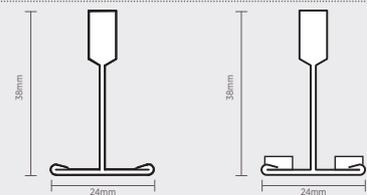

## EDGE DETAIL

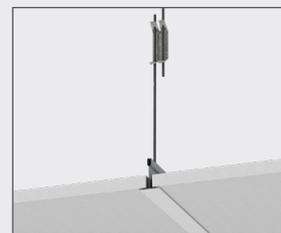

SQUARE EDGE - SQ

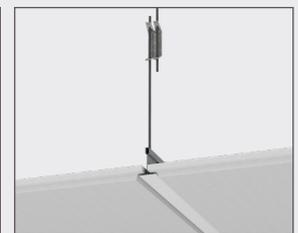

SHADOWLINE TAPERED - SLT


# USG DONN® BRAND AX™/AXCE™ SUSPENSION SYSTEM (ALUMINIUM)

## PRODUCT INFORMATION

Description	Item Reference	Load*	Profile Height	Component Length
Main Runner	AX26/AXCE26	10.5KG/LM	38MM	3600/3660MM
Long Cross Tee	AX424/AXCE424		38MM	1200/1220MM
Short Cross Tee	AX224/AXCE224		38MM	600/610MM
Wall Angle	M7A/ M7ACE		22MM	3600MM
U-Trim	UT123525 - UT124825 - UT125325		25.4/12.7MM	3000MM

\* Load of 4" hanger spacing in KG/LM and deflection limit of L/360


### Main Runner AX26/AXCE26

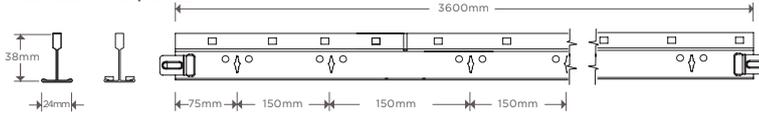


### Long Cross Tee AX424/AXCE424




### Short Cross Tee AX224/AXCE224




### Wall Angle



### U-Trim

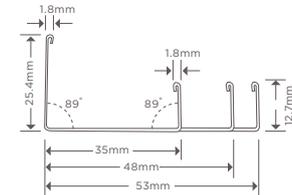

## SUSPENSION OPTIONS



Adjustable Hanger

## PHYSICAL DATA

### Material

Double-web aluminium tee with aluminium cap and stainless steel Quick-Release™ clip. Baked-on polyester paint or powder-coated finish.

### Installation

Install according to ASTM C636, ASTM E580 and USG requirements.

### Limitations

- Non-fire-rated applications only. Finish is not UV-resistant; should not be installed with direct exposure to sun or weather.
- Indirect exposure to severe environmental conditions may shorten the lifespan of the product.
- The gasket face applied to USG Donn® Brand AXCE™ contains a protective strip that must be removed prior to panel installation.
- The standard gasket is not recommended for installations with metal panels.
- If metal panels are desired, a special gasket suitable for metal panels may be applied to the USG Donn® Brand DXACE™ suspension system through special order.

### ASTM Load Compliance

Classified as Light, Intermediate or Heavy Duty when tested in accordance with ASTM C635.

USG DONN® Brand AX™/AXCE™ Suspension System (Aluminium)  
Version #: 02 / Revision date: 5-September-2022 / Issue date: 27-August-2020 / Doc. Ref. GR-TDS008-2

**Notice:**  
As we are involved in constant products development; this document information is subject to change without prior notice. Please always refer to [usgme.com](http://usgme.com) for the updated products information document.

©2022 Factory of USG Middle East LTD. Co. All rights reserved.