


USG DONN® BRAND DXI® IDENTITEE® SUSPENSION SYSTEM

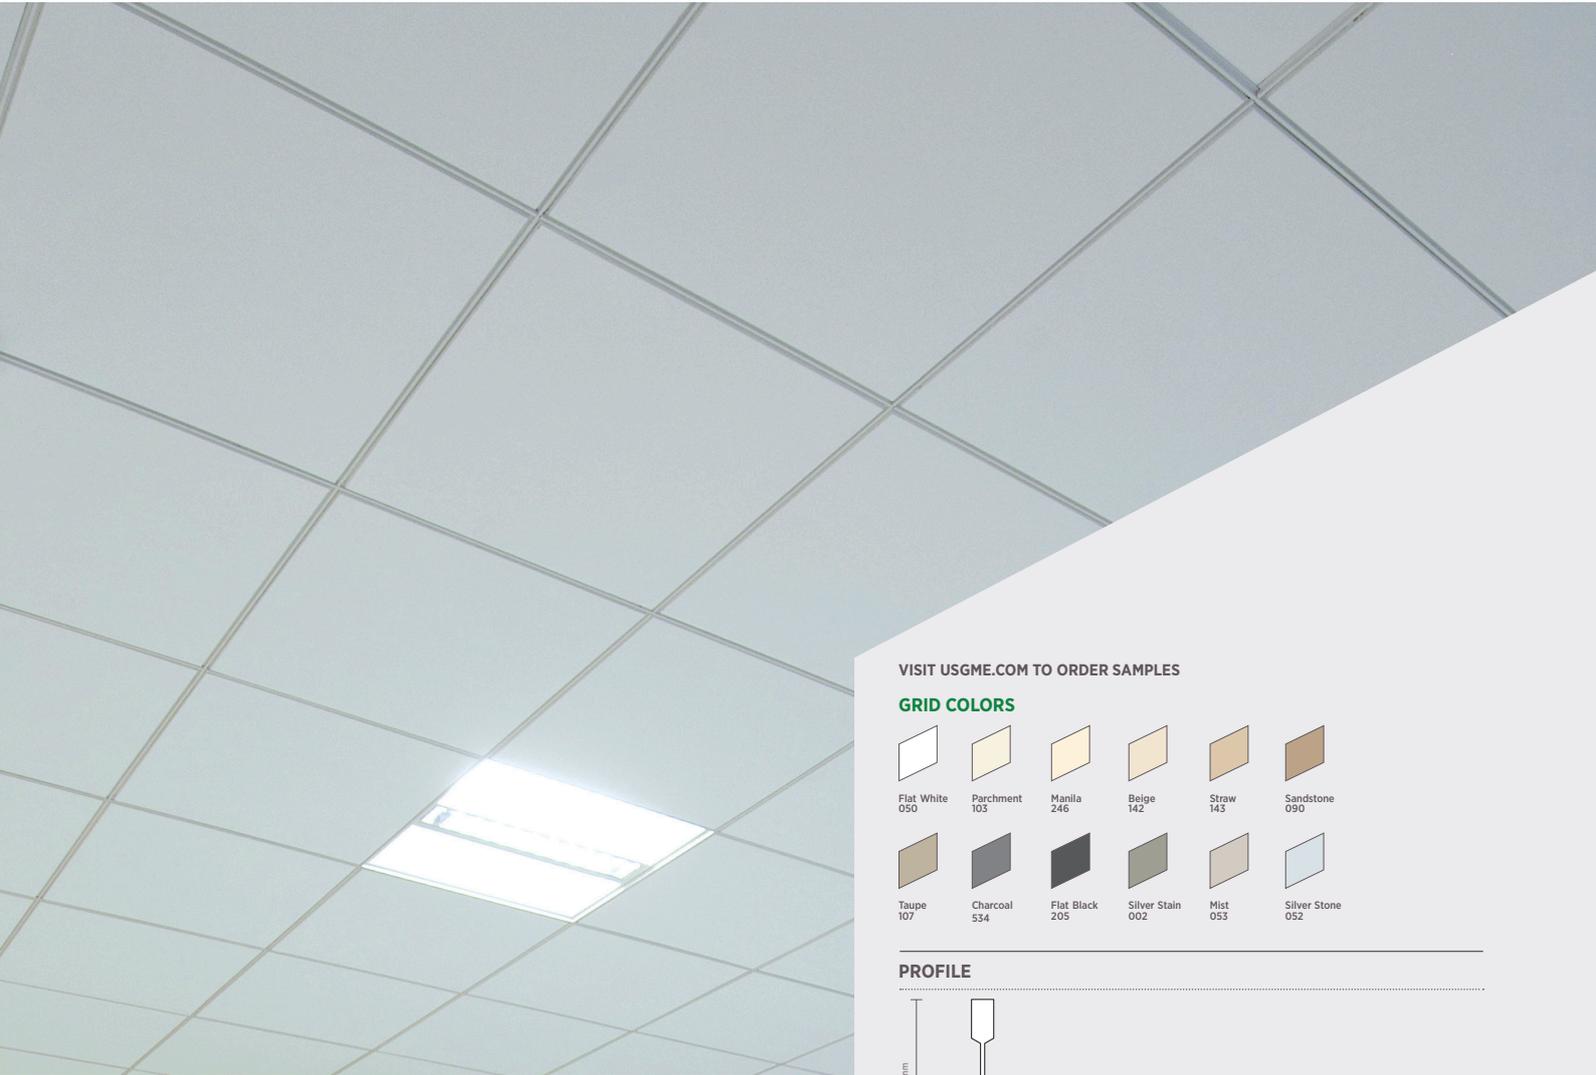

FEATURES AND BENEFITS

- Narrow-profile grid system with double 3.175mm reveal.
- Seamless reveal at intersections.
- Meets or exceeds all national code requirements including seismic.
- Compatible with USG Logix™ Integrated System.
- Custom colors available.
- ICC-ES evaluated for seismic installations (ESR-1222).
- G30 hot-dipped galvanized steel body and cap inhibits red rust.
- All USG Donn® Brand Identitee® DXI™ items have High Recycled Content (HRC).
- Available in metric and imperial sizes.
- Proprietary cap lance allows a variety of color and coating options to meet unique project requirements.
- Comply with CDPH 01350 V.2-2017 for low VOC emission.

APPLICATIONS


- All interior general-use areas
- USG Logix™ Integrated System

VISIT USGME.COM TO ORDER SAMPLES


GRID COLORS




PROFILE



EDGE DETAIL



FINELINE BEVELED - FLB



FINELINE - FL


USG DONN® BRAND DXI® IDENTITEE® SUSPENSION SYSTEM

PRODUCT INFORMATION


| Description | Item Reference | Load* | Profile Height | Component Length |
|-----------------------|--------------------------------|---------|------------------|------------------|
| Main Runner | DXI26HRC | 24KG/LM | 46MM | 3600/3660MM |
| Long Cross Tee | DXI424HRC | 24KG/LM | 46MM | 1200/1220MM |
| Short Cross Tee | DXI224HRC | 24KG/LM | 46MM | 600/610MM |
| Wall Angle | 802MT3600 | | 24MM | 3600MM |
| Wall Angle Shadowline | 802MS3600 - 802MS164L | | 19/9MM - 20/20MM | 3600MM |
| U-Trim | UT123525 - UT124825 - UT125325 | | 25.4/12.7MM | 3000MM |

* Load of 4" hanger spacing in KG/LM and deflection limit of L/360


Main Runner DXI26HRC




Long Cross Tee DXI424HRC

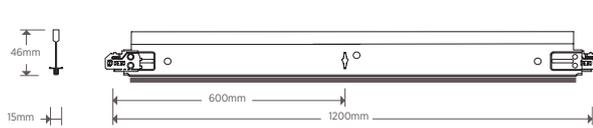


Short Cross Tee DXI224HRC




Wall Angle

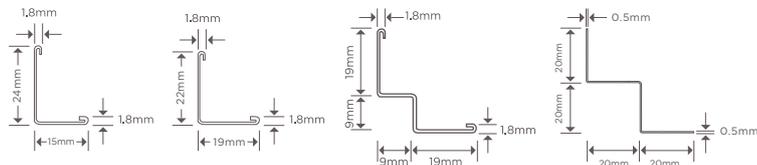

U-Trim



SUSPENSION OPTIONS

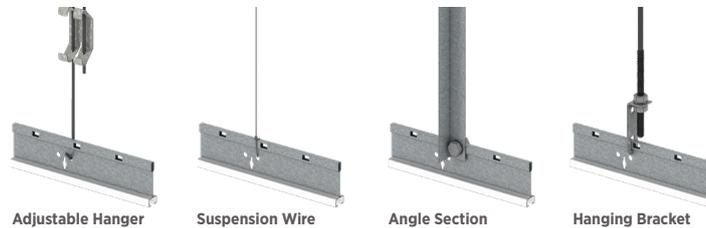

Adjustable Hanger

Suspension Wire

Angle Section

Hanging Bracket

Material

Min. G30 hot-dipped galvanized steel body and cap. Baked-on polyester paint.

Installation

Install according to ASTM C636, ASTM E580 and USG requirements.

Limitations

- Please refer to USG Donn® Brand AX™ or ZXL™ for exposed suspension systems in non-fire-rated, high-humidity applications.
- Interior applications only.

Optional accessories

- Face Sleeve Seismic expansion joints.
- Intersection Sleeve for off-module intersection.

USG DONN® BRAND DXI® IDENTITEE® Suspension System
Version #: 02 / Revision date: 5-September-2022 / Issue date: 27-August-2020 / Doc. Ref. GR-TDS007-2

PHYSICAL DATA

Notice:

As we are involved in constant products development; this document information is subject to change without prior notice. Please always refer to usgme.com for the updated products information document.

©2022 Factory of USG Middle East LTD. Co. All rights reserved.