



USG MIDDLE EAST DRYWALL J-TRIMS

FEATURES & BENEFITS


Metal J Trims

Protect Drywall edges around door and window openings and provide a smooth trim line at intersections.

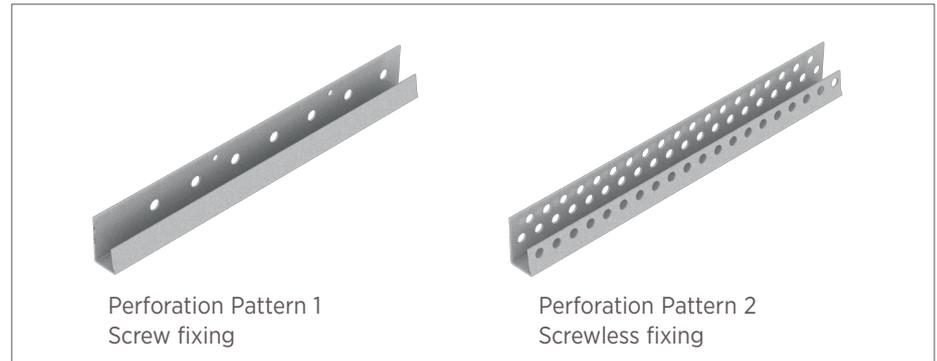

JT1313-045

Designed for 12.5 and 12.7 Boards



JT1316-045

Designed for 15, 15.9 and 16mm Boards

DIMENSIONS

Length: 3000 mm
Dimensions: 13x14x25 mm or 13x17x25 mm
Thickness: 0.45 mm
Perforations: Standard - 2 Patterns

RAW MATERIALS

Galvanized steel G90

STEEL GRADE

Yield stress, Fy 33 ksi Ultimate

ASTM & CODE STANDARDS

- Metal J-trims are produced to meet or exceed ASTM C645 and C955.
- Galvanized sheet steel meets or exceeds requirements of ASTM A-653.
- For installation & storage information refer to ASTM C1007 & C754.

GREEN BENEFITS

LEED Credit MR 2 - USG products are manufactured from coldformed steel. Steel is 100% recyclable, which helps divert debris from the waste stream.
 LEED Credit MR 4 - USG steel products have a minimum of 25.5% post-consumer recycled content, and 6.8% pre-consumer.

REFERENCES

For further health and safety instructions, refer to the Safety Data Sheet (SDS) for this product, available from your USG Middle East sales office or USGme.com

Notice:

As we are involved in constant products development; this document information is subject to change without prior notice. Please always refer to usgme.com for the updated products information document.