


USG MIDDLE EAST DRYWALL L-CORNERS BEADS

FEATURES & BENEFITS



Metal L Corner Beads

Used to reinforce Drywall and deliver a monolithic and seamless finish along its corners and intersections.

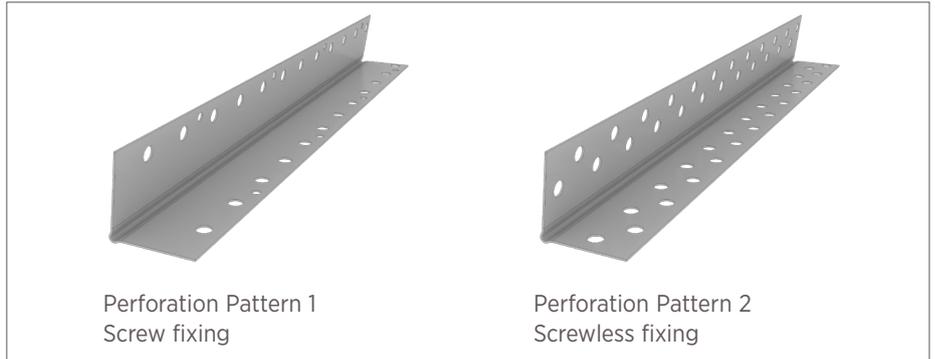

Perforation Pattern 1
Screw fixing

Perforation Pattern 2
Screwless fixing



DIMENSIONS

Length: 3000 mm
Width: 32x32 mm or 28x28 mm
Thickness: 0.45 mm
Perforations: Standard - 2 Patterns

MATERIAL PROPERTIES

Yield stress, Fy 33 ksi Ultimate, with G90 Zinc coating

ASTM & CODE STANDARDS

- Steel Corner Beads are produced to meet or exceed ASTM C645 and C955
- Galvanized sheet steel meets or exceeds requirements of ASTM A-653
- For installation & storage information refer to ASTM C1047 & C754

GREEN BENEFITS

LEED Credit MR 2 – USG products are manufactured from coldformed steel. Steel is 100% recyclable, which helps divert debris from the waste stream.
LEED Credit MR 4 – USG steel products have a minimum of 25.5% post-consumer recycled content, and 6.8% pre-consumer.

REFERENCES

For further health and safety instructions, refer to the Safety Data Sheet (SDS) for this product, available from your USG Middle East sales office or USGme.com

Notice:

As we are involved in constant products development; this document information is subject to change without prior notice. Please always refer to usgme.com for the updated products information document.